


B8TURBOEXIR2W

HD 1080p Turbo HD Bullet Camera



epcom®

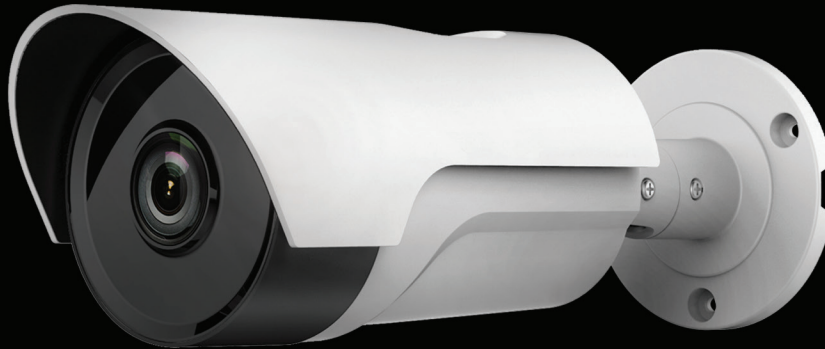

► Camera

Image Sensor	1/3" Progressive Scan CMOS
Signal System	PAL / NTSC
Effective Pixels	1920(H) * 1080(V)
Min. Illumination	0.01Lux @ (F1.2, AGC ON), 0 Lux with IR
Shutter Speed	1/25 (1/30)s to 1/50,000 s
Lens	3.6mm (2.8mm, 6mm, 8mm optional) Angle of view: 80.9° (3.6mm), 103.5°(2.8mm), 54.3° (6mm), 38° (8mm)
Lens Mount	M12
Day & Night	ICR
Synchronization	Internal synchronization
Video Frame Rate	1080p @ 25 fps / 1080p @ 30 fps
HD Video Output	1 Analog HD output
CVBS Output	1Vp-p Composite Output (75Ω / BNC)
S/N Ratio	More than 52dB

► General

Working Temperature/ Humidity	-20°C-60°C(-4°F-140°F) Humidity 90% or less (non-condensing)
Power Supply	12 VDC
Power Consumption	Max. 4W
Weather Proof Ratings	IP66
IR Range	Up to 80m
Communication	Up the coax(need UTC controller) Protocol: Pelco-C(Coaxitron)
Dimensions	94.6×83×210.8mm(3.72"×3.27"×8.30")
Weight	700 g (1.54 lbs)

► Menu

Scene	Indoor, outdoor, indoor1, LOW-LIGHT
Camera ID	On/off (15 characters, position programmable)
AGC	Support
D/N Mode	Color/BW/EXT
White Balance	ATW, AWC-SET, Indoor, Outdoor, Manual
Privacy Mask	On/Off, maximum 8 zones
Motion Detection	On/Off, maximum 4 zones
BLC	Support
Anti-flicker	On/off
Language	English, japanese, CHN1, CHN2, korean, german, french, italian, spanish, polish, russian, portuguese, dutch, turkish, hebrew and arabic
Function	Eclipse, digital noise reduction, digital zoom (62X), slow shutter, mirror, defog, defect pixel correction, SMART-DZOOM

► Key Features

HD1080p video output
Adopt HDTV Technology
True Day/Night
OSD menu, 3D DNR, Smart IR
EXIR technology, 20/40m IR distance
IP66 weatherproof
Up the Coax (via coaxial cable)

TURBOHD ▶ series